


banana bike GT

Thank you for choosing Banana Bike. A Banana Bike is a fantastic first bike and a great way for your child to learn the basics of biking, learning to balance and steer whilst having massive fun!

If you have any questions or issues, please email us at: hello@banana-bike.com


Some parts may be preassembled on the forks / frame

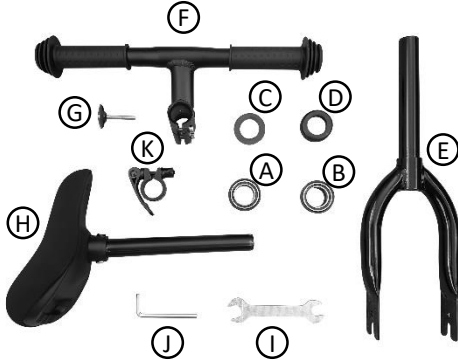



- A & B - Bearings (Pair)
- C - Flat Plastic Washer
- D - Domed Plastic Washer
- E - Forks
- F - Handlebars
- G - Head Disk & Bolt
- H - Seat & Seat Post Unit
- I - Spanner
- J - Hex Key
- K - Quick Release Clamp
- L - Frame
- M - Wheels




Attach the Forks & Handlebars to the Frame




1. Lay the forks and frame on the floor
2. Slide the flat plastic washer (C) over the fork shaft (E)
3. Slide the bearings (A & B) into the frame head tube
4. Slide the forks through the bearings and frame head tube
5. Slide the domed washer (D) over the forks to rest on the top of the bearing (B)

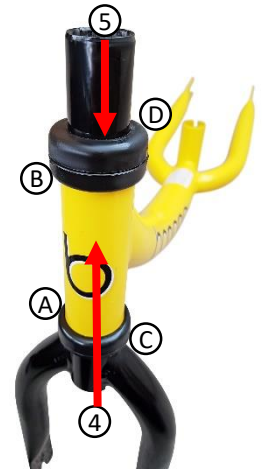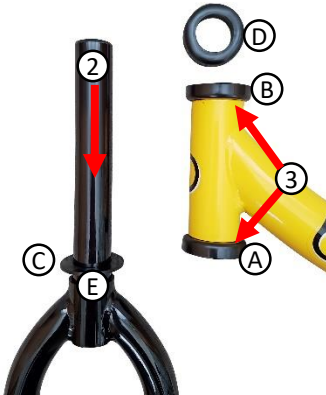

6. Stand the bike up on its forks. Slide the handlebars (F) over the forks (E)
7. Applying a small amount of downwards pressure tighten the top hex bolt, using the hex tool (J) until it starts to grip on the forks
8. Then ensure the forks and handlebars are parallel
9. Fully tighten both hex bolts (Important)
10. The handlebars and forks should now be fully joined and have a smooth turning action
11. Add the head disk (G) and tighten using the hex key

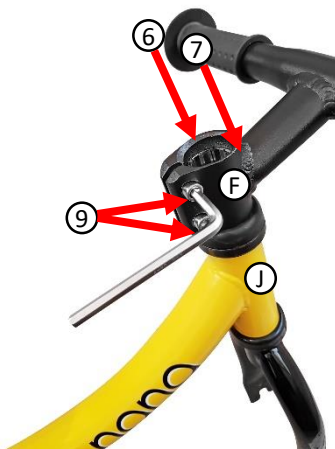


Fit the Seat

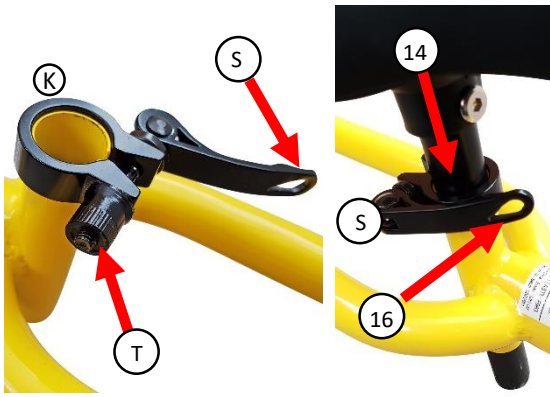

12. Fit the quick release clamp (K) over the top of frame.
13. With the lever open (S), lightly tighten the clamp (T) until the arm no longer hangs down
14. Slide the seat post into the frame until the seat is at the required height. Please note the post minimum insertion mark.
15. Ensure the seat is aligned with the frame.
16. Close the clamp arm and test the seat is tight (Important!)
17. If the seat moves, open the arm, tighten the clamp further with fingers or hex key, then reclose arm.

Attach the Wheels to the Frame

18. Turn the bike over with the handlebars on the floor
19. To fit the front wheel, remove the dome nut (O) and hooked safety clip (N) from each end of the axle.
20. Slide the axle into place between the forks
21. Slide a hooked safety clip (N) over each end of the axle and hook them through the hole in the frame.
22. Fully tighten the dome nuts (O) (Important!).
23. Repeat with rear wheel.
24. Inflate tires to 44PSI or 3BAR
25. Regularly check that the dome nuts are tight. (Important!)

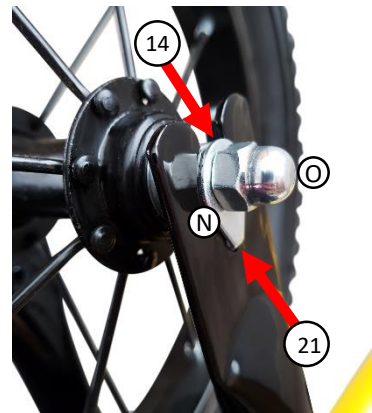

Congratulations! The bike is now ready to ride, this is where the fun starts!

If you have any questions, issues or feedback please email us at:
hello@banana-bike.com or visit <http://www.banana-bike.com/contact>

Stay Safe

1. **IMPORTANT!** Before riding, an adult should check that the seat, wheels and handlebars are tight and secure, failure to do so could result in an accident.
2. For the child's personal safety, always use safety equipment such as Helmet, Elbow pads, Knee Pads, and Gloves. Always wear shoes when riding.
3. Ride on smooth paved flat surfaces without any traffic. Not for use on public roads.
4. Always use under Adult Supervision.
5. Do not ride at dusk, at night, or at times of limited visibility and unfit weather.
6. Replace worn or broken parts immediately and service the bike regularly.



International

DE - Eine ausführliche Anleitung finden Sie unter:
banana-bike.de

FR - Pour des instructions complètes s'il vous plaît visitez:
banana-bike.fr

ES - Para obtener instrucciones completas, visite:
banana-bike.es

IT - Per le istruzioni complete, visitare il sito:
banana-bike.it