

# banana bike LT

Thank you for choosing Banana Bike. A Banana Bike is a fantastic first bike and a great way for your child to learn the basics of biking, learning to balance and steer whilst having massive fun!

If you have any questions or issues, please email us at: [hello@banana-bike.com](mailto:hello@banana-bike.com)


Some parts may be preassembled on the forks / frame




- A & B - Bearings (Pair)
- C - Flat Plastic Washer
- D - Domed Plastic Washer
- E - Forks
- F - Handlebars
- G - Aluminium Hex Clamp
- H - Seat & Seat Post Unit
- I - Spanner
- J - Hex Key
- K - Quick Release Clamp
- L - Frame
- M - Wheels




## Attach the Forks & Handlebars to the Frame



1. Lay the forks and frame on the floor
2. Slide the flat plastic washer (C) over the fork shaft (E)
3. Slide the bearings (A & B) into the frame head tube
4. Slide the forks through the bearings and frame head tube
5. Slide the domed bearing (D) over the forks to rest on the top of the bearing (B)

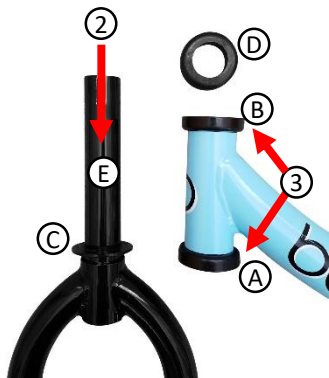

6. Stand the bike up on its forks. Slide the aluminium hex clamp (G) over the fork shaft

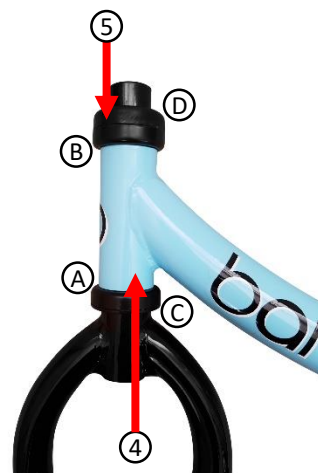


7. Slide the handlebars (F) into the fork shaft, ensure handlebars are inserted past the minimum insertion mark
8. Applying a small amount of downwards pressure to the hex clamp (G), tighten the hex clamp (G), using the hex tool (J) until it starts to grip the forks and handlebars



9. Then ensure the forks and handlebars are parallel
10. Tighten the aluminium hex clamp until handlebars are secure (Important!)
11. The handlebars and forks should now be fully joined and have a smooth turning action


## Fit the Seat

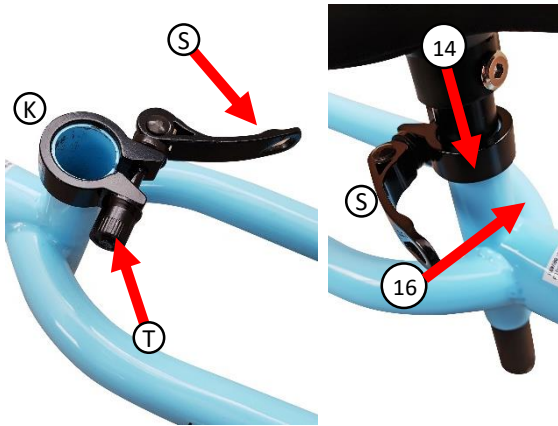

12. Fit the quick release clamp (K) over the top of frame.
13. With the lever open (S), lightly tighten the clamp (T) until the arm no longer hangs down
14. Slide the seat post into the frame until the seat is at the required height. Please note the post minimum insertion mark.
15. Ensure the seat is aligned with the frame.
16. Close the clamp arm and test the seat is tight (Important!)
17. If the seat moves, open the arm, tighten the clamp further with fingers or hex key, then reclose arm.

## Attach the Wheels to the Frame

18. Turn the bike over with the handlebars on the floor.
19. To fit the front wheel, remove the dome nut (O) and hooked safety clip (N) from each end of the axle.
20. Slide the axle into place between the forks.
21. The spacers (P) and inner nuts (R) sit between the wheel bearing and the forks.
22. Slide a hooked safety clip (N) over each end of the axle and hook them through the hole in the frame.
23. Fully tighten the dome nuts (O) (Important!).
24. Repeat with rear wheel.
25. Regularly check that the dome nuts are tight. (Important!)

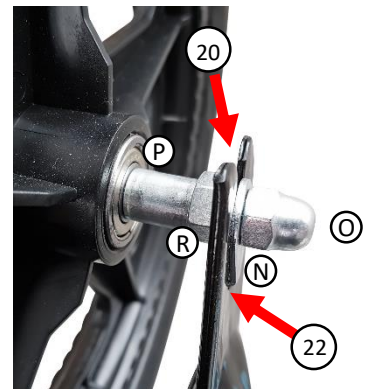

**Congratulations! The bike is now ready to ride, this is where the fun starts!**

If you have any questions, issues or feedback please email us at:  
[hello@banana-bike.com](mailto:hello@banana-bike.com) or visit <http://www.banana-bike.com/contact>

## Stay Safe

1. **IMPORTANT!** Before riding, an adult should check that the seat, wheels and handlebars are tight and secure, failure to do so could result in an accident.
2. For the child's personal safety, always use safety equipment such as Helmet, Elbow pads, Knee Pads, and Gloves. Always wear shoes when riding.
3. Ride on smooth paved flat surfaces without any traffic. Not for use on public roads.
4. Always use under Adult Supervision.
5. Do not ride at dusk, at night, or at times of limited visibility and unfit weather.
6. Replace worn or broken parts immediately and service the bike regularly.



## International

**DE** - Eine ausführliche Anleitung finden Sie unter:  
[banana-bike.de](http://banana-bike.de)

**FR** - Pour des instructions complètes s'il vous plaît visitez:  
[banana-bike.fr](http://banana-bike.fr)

**ES** - Para obtener instrucciones completas, visite:  
[banana-bike.es](http://banana-bike.es)

**IT** - Per le istruzioni complete, visitare il sito:  
[banana-bike.it](http://banana-bike.it)